

YFSK parvis skjermet signalkabel 0,50mm²

4 par 0,5 YFSK

Nexans Ref.: 10021535


Country Ref.: 1088303

EAN 13: 7045210005981

Fletrådet, parvis AL-folieskjermet, med PVC lederisolasjon og grå PVC ytre kappe.

DESCRIPTION

Benyttes i lyd anlegg, industrielle applikasjoner som styrings- og prosessanlegg. Tilfredstiller kravene til RS 422B

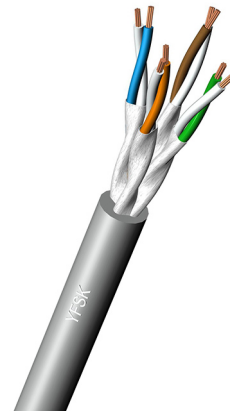

STANDARDS

International IEC 60332-1-2

YFSK parvis skjermet signalkabel 0,50mm²

4 par 0,5 YFSK

CHARACTERISTICS

Construction characteristics

Type of conductor	Circular, stranded
Conductor material	Tinned copper
Insulation	PE
Twisted	Yes
Screen	Individual screen : Alu/Polyester tape
Outer sheath	Overall Grey PVC
Sheath colour	Grey
With Green/Yellow core	No

Dimensional characteristics

Cable length	500 m
Number of pairs	4
Nominal outer diameter	9.0 mm
Approximate weight	11.2 kg/km
Area	0.5 m ²

Electrical characteristics

Capacitance unbalance pair to pair	95 pF/km
Characteristic impedance	65 Ohm
Loop resistance, max. at 20°C	75 Ohm/km
Maximum operating voltage	60 V
Ohmical resistance of the insulation	1000 MOhm.km
Test voltage	500 V

Usage characteristics

Length	500 m
--------	-------