

H01N2-D welding cables with reinforced sheath

H01N2-D 1x70 cut to length

Nexans Ref.: 10056642
Country Ref.: 1026854
EAN 13: 3427680003164


DESCRIPTION

Application

Industry, and especially the steel construction, consumes steel in various forms: metal sheets, tubes and so on. Consequently the trade of welding is dominating in this activity. Nexans is present on this market, and proposes to its customers a range of welding cables which is characterized by a high flexibility.

Installation

Electrical supply of moving welding machines. This cable connects the welding equipment to the electrode holder. It is also recommended for all flexible links working under a low voltage U0/U 100/100V maximum. The flexible conductors and the reinforced sheath give to the cables H01N2-D a high flexibility.

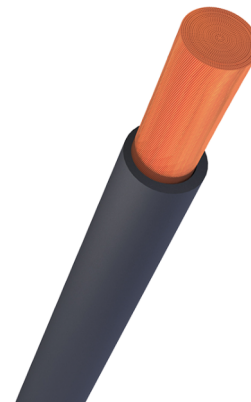

STANDARDS

International EN 50525-2-81;
HD 22.6; IEC 60245

National NF C 32-510



Conductor flexibility
Extra-flexible
class 6



Cable flexibility
Very flexible



Mechanical
resistance to
impacts
Medium



Chemical
resistance
Oil resistant



Flame retardant
EN 60332-1-2



Max. conductor
temp. in service
85 °C



Static bending rad.
52 mm



Operating temp.
-25 - 60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 12/2/21 www.nexans.no Page 1 / 2

H01N2-D welding cables with reinforced sheath

H01N2-D 1x70 cut to length

CHARACTERISTICS

Construction characteristics

Conductor flexibility	Extra-flexible class 6
Conductor material	Bare annealed copper stranded
Outer sheath	Special crosslinked Elastomer EM5
Protection	-
Sheath colour	Black

Dimensional characteristics

Conductor cross-section	70 mm ²
Maximum outer diameter	19.2 mm
Minimum outer diameter	15.3 mm
Approximate weight	736 kg/km
Conductor diameter	11.0 mm
Dimensional standards	IEC 60228, NF C 32-013
Number of cores	1

Electrical characteristics

Nominal Voltage	100 V
Permissible current rating in open air	340 A

Mechanical characteristics

Cable flexibility	Very flexible
Mechanical resistance to impacts	Medium

Usage characteristics

Packaging	Cut to length
Chemical resistance	Oil resistant
Flame retardant	EN 60332-1-2
Max. conductor temperature in service	85 °C
Minimum static operating bending radius	52 mm
Operating temperature, range	-25 - 60 °C
Short-circuit max. conductor temperature	250 °C
Water proof	Accidental
Weather resistance	Good