

# BFXI 0,6/1 kV ALSECURE PLUS

BFXI 0,6/1 kV 3x6

Nexans Ref.: 10262444  
Country Ref.: 1067379  
EAN 13: 7045210079234

Uo/U: 0,6/1 kV  
Halogen free, fire resistant, double insulated cables

## DESCRIPTION

ALSECURE® PLUS BFXI 0,6/1 kV cables are designed to be used in safety systems (emergency lights, warning systems, fire fighting equipments, etc ...) in all premises open to the public (concert hall, theaters, cinemas, department stores, hospitals, schools, etc ...), in high-rises buildings, in tunnels, in industries.


ALSECURE® PLUS cables, with **MICA tape** technology, are **fire resistant** and fire retardant, low smoke and **halogen free**. In the event of fire, emitted gazes are non corrosive and have a very low toxicity.

## Installation

- To be installed in accordance with the current regulation.
- For indoor and outdoor use. UV-resistant outer sheath, however insulated conductors would need extra protection if exposed to UV light.
- If buried into the ground, extra protection is needed, for example conduit or covering boards

## Fire performance

Fire resistant according to: IEC 60331-21, 1000 deg. Celsius for minimum 90 minutes  
Fire retardant according to : IEC 60332-3C

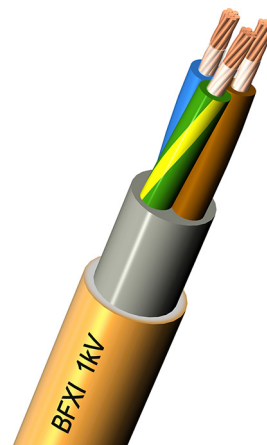

## STANDARDS

International HD 604.5D;  
IEC 60228; IEC 60331-21 ;  
IEC 60332-1-2;  
IEC 60332-3 Cat.C; IEC 60754;  
IEC 61034-1/2



Halogen free  
IEC 60754-1



Conductor flexibility  
Stranded class 2



Rated Voltage Uo/U  
(Um)  
0,6/1 kV



Cable flexibility  
12 x D



Fire resistant  
IEC 60331-21



Smoke density  
IEC 61034



Gases toxicity  
Low



Gases corrosivity  
IEC 60754-2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 12/2/21 www.nexans.no Page 1 / 2

# BFXI 0,6/1 kV ALSECURE PLUS

BFXI 0,6/1 kV 3x6

## CHARACTERISTICS

### Construction characteristics

Halogen free	IEC 60754-1
Insulation	Micatape + XLPE
Outer sheath	Halogen free compound
Sheath colour	Orange
Conductor flexibility	Stranded class 2
Conductor material	Copper class 2
Conductor shape	Circular
With Green/Yellow core	No

### Dimensional characteristics

Nominal outer diameter	14.5 mm
Approximate weight	364 kg/km
Conductor cross-section	6 mm <sup>2</sup>
Conductor diameter	3.0 mm
Number of cores	3

### Electrical characteristics

Rated Voltage U <sub>0</sub> /U (U <sub>m</sub> )	0.6/1 kV
---	----------

### Mechanical characteristics

Cable flexibility	12 x D
-------------------	--------

### Usage characteristics

Fire resistant	IEC 60331-21
Smoke density	IEC 61034
Gases toxicity	Low
Gases corrosivity	IEC 60754-2
Flame retardant	IEC 60332 Part 3 Cat. C
Max. conductor temperature in service	90 °C