

LiYCY 300/500V Reel/100m

LiYCY 4 x 0,75 Reel/100m

Nexans Ref.: 10265509

Country Ref.: 1005687

EAN 13: 704510081510

Flexible shielded singalkabel

DESCRIPTION


LiYCY 300/500 V is a flexible shielded signal cable that is widely used in control systems. LiYCY 300/500 V is a natural choice for signaling-, Instrumentation-, process and facility systems. The cable is primarily designed for indoor use, but can be used outdoors with extra protection. The conductors are color-coded according to DIN 47100. LiYCY 300/500 V can be supplied as a halogen free cable, it is then called LiHCH.

Technical Data

- Operating Voltage: 300 / 500 V
- Test Voltage: 1200 V
- Insulation Res.: > 200 MΩ km
- Temperature Range: -20°C ... + 70°C
- Temperature Range Flexible: -5°C ... + 70°C
- Min. Bending Radius: 10 x Overall Diameter

Construction

- Class 5 copper conductors according to IEC 60228
- PVC insulation, with colour coding according to DIN47100
- Polyester tape wrapping
- Tinned copper wire braiding; coverage 70%±3%
- PVC outer sheath, RAL7001 Grey Colour
- Reference Standards: VDE 0814 and VDE0812

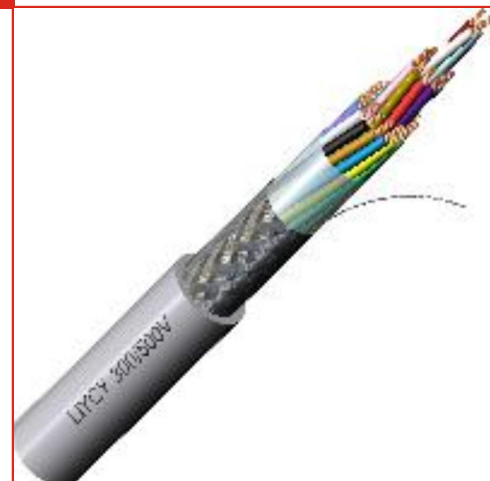

STANDARDS

International IEC 60228;
IEC 60332-1-2



RoHS compliant
Yes

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 1/20/22 www.nexans.no Page 1 / 2

LiYCY 300/500V Reel/100m

LiYCY 4 x 0,75 Reel/100m

CHARACTERISTICS

Construction characteristics

Armour type	Tinned copper braid
Conductor material	Bare copper class 5
Insulation	PVC-compound T12
Outer sheath	PVC
Sheath colour	Grey RAL 7001

Dimensional characteristics

Approximate weight	71 kg/km
Outer Diameter	6.5 mm
Conductor cross-section	0.75 mm ²
Number of cores	4

Electrical characteristics

Breakdown voltage	3 kV
Resistance of the insulation	200 MOhm
Test voltage	1200 V

Usage characteristics

Minimum bending radius, static (XD)	10
Operating temperature flexing, range	- °C
Operating temperature, fixed, range	-20 - 70 °C
RoHS compliant	Yes