

LANmark-OF Slimflex Patch Cords OM4

LANmark-OF Slimflex Patch Cord DSC - DSC OM4 LSZH Aqua Xm

Nexans Ref.: N122.7CCAX

- Optical fiber patch cords
- LANmark-OF OM4 performance
- GIGAliteFLEX bend insensitive fibre
- For use in cabinets and workplaces

DESCRIPTION

Guarantees and installation

Nexans LANmark-OF optical fibre patch cords have been designed for indoor applications in support of high speed protocols.

High speed protocols supported include, but are not limited to

- Ethernet: 1GBase-SX, 10GBase-SR, 25GBASE-SR
- Fibre channel Serial: 4G, 8G, 16G and 32G

Details on the supported distances can be found in the LANmark-OF warranty modules.

Typical installation environments are:


- Cabinets to connect patch panels to active equipment.
- Cross connects in data centres.
- Suitable for use in the work area to connect the workstation to the wall outlet (Fibre To The Desk).

Characteristics

- Patch cord cable is according to IEC 60794-2-50
- Maximum insertion loss according to IEC 61300-3-4: 0.25 dB
- Typical insertion loss: 0.1 dB
- Minimum return loss according to IEC 61300-3-6: 30 dB
- Duplex LC-LC, duplex LC-SC and duplex SC-SC patch cords have a duplex cable construction with a diameter of 2 X 2.0 mm.
- Short connector boots of 19mm
- Small bend radius: 10 mm
- A label is added close to the duplex connector for traceability of the measurement results

Fibre

The LANmark-OF OM4 patch cords have LANmark-OF OM4 GIGAliteFLEX fibre inside. This bend insensitive multimode fibre has a small bend radius and is compliant to IEC 60793-2-10, fibre model A1a.3b.

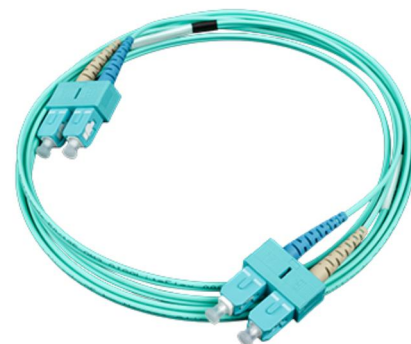

LANmark-OF

STANDARDS

International ISO/IEC 11801



Flame retardant
IEC 60332-1



Static bending rad.
10 mm



Operating temp.
-10 - 50 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/20/22 www.nexans.no Page 1 / 3

 Nexans

LANmark-OF Slimflex Patch Cords OM4

LANmark-OF Slimflex Patch Cord DSC - DSC OM4 LSZH Aqua Xm

Design

Nexans LANmark-OF patch cords designed according to the "Cross-Over" wiring principle to improve field installation (A1-B2, B1-A2). This conforms to the requirements of IEC 11801 and EN 50174-1:2009.

The "butterfly" duplex clip allows to change the polarity on site easily by simply removing the 2 connectors and put them in a reverse order back into the same clip. No tool is required for this polarity change.

CHARACTERISTICS

Construction characteristics

Armour type	Aramid yarn
Colour	Aqua
Connector type	Duplex SC-SC
Fiber optic type	OM4 50/125
Outer sheath	LSZH-FR

Dimensional characteristics

Width	4 mm
Height	2 mm
Nominal inner diameter	2.0 mm

Transmission characteristics

Insertion Loss, maximum, dB	0.25 dB
Return Loss, Minimum, dB	30 dB

Mechanical characteristics

Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum pulling force (IEC 60794-1-2-E1)	200 N

Usage characteristics

Flame retardant	IEC 60332-1
Minimum static operating bending radius	10 mm
Operating temperature, range	-10 - 50 °C



Flame retardant
IEC 60332-1



Static bending rad.
10 mm



Operating temp.
-10 - 50 °C


All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/20/22 www.nexans.no Page 2 / 3

LANmark-OF Slimflex Patch Cords OM4

LANmark-OF Slimflex Patch Cord DSC - DSC OM4 LSZH Aqua Xm

SCHEMATIC POLARITY DUPLEX PATCH CORD

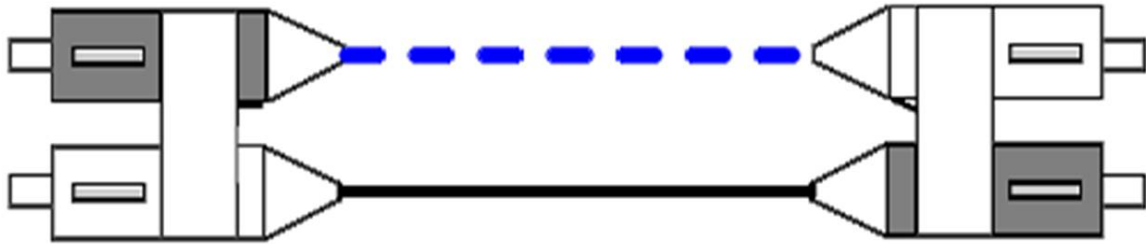

Cross-over patch cord (A1 to B2 & B1 to A2)